


FP-1200

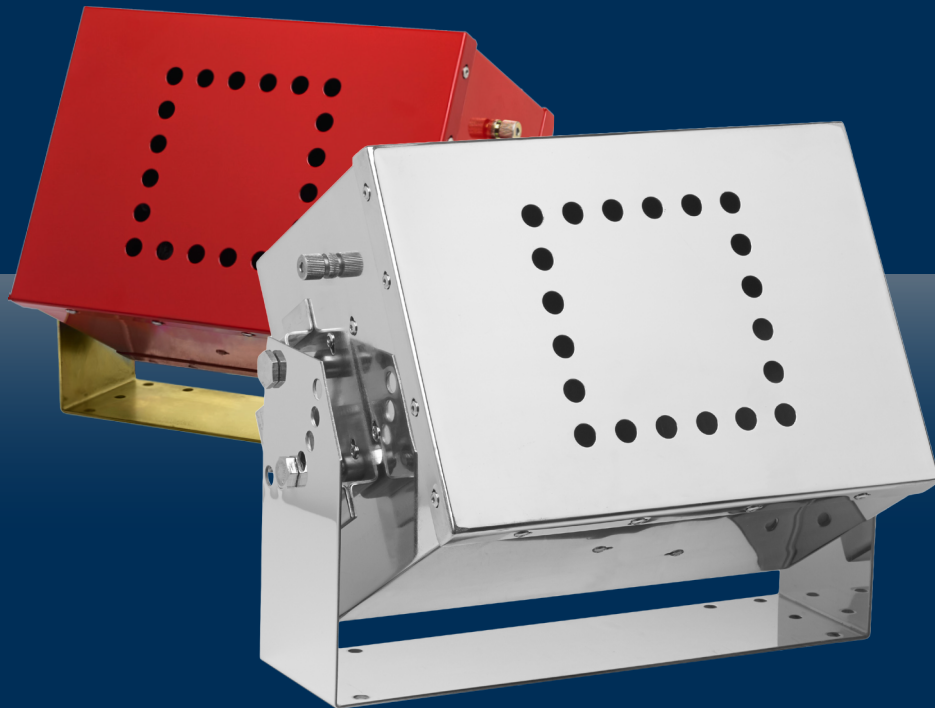

■ FP-1200

Product Code: 10147

Product Description: **FirePro Fire Extinguishing Generator FP-1200.**

Features:

- UL, KIWA, BSI, ActivFire Approved
- Carbon-Steel casing Red-coated

■ FP-1200S

Product Code: 10395

Product Description: **FirePro Fire Extinguishing Generator FP-1200S.**

Features:

- UL, KIWA, BSI, ActivFire Approved
- Stainless steel casing

■ FP-1200T

Product Code: 10316

Product Description: **FirePro Fire Extinguishing Generator FP-1200T.**

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator.
- Carbon-Steel casing Red-coated

■ FP-1200TS

Product Code: 10622

Product Description: **FirePro Fire Extinguishing Generator FP-1200TS.**

Features:

- Under Process to be UL, KIWA, BSI, ActivFire Approved
- This model can be activated by a Bulb Thermal Activator
- Stainless steel casing

TECHNICAL INFORMATION

Model	FP-1200 / FP-1200S / FP-1200T / FP-1200TS
Activation mechanism	Thermal Electrical (min 1.5V DC, 0.8A in 3-4 sec)
Activator type	Heating element with 2.3 ohm resistance
Current intensity to be tested	Maximum 5 mA
Weight (gross)	10900 g (excluding bracket)
Mass of FPC compound	1200 g
Operational discharge time	10 - 15 seconds
Discharge length	3.5 m
Dimensions	216 mm x 300 mm x 167 mm
Fire class	A, B, C, F

Operating temperatures: -54°C to +54°C | Generators are provided complete with brackets